


ROHS

A - coded								
B - coded								
D - coded								

37±0.2

L±10%

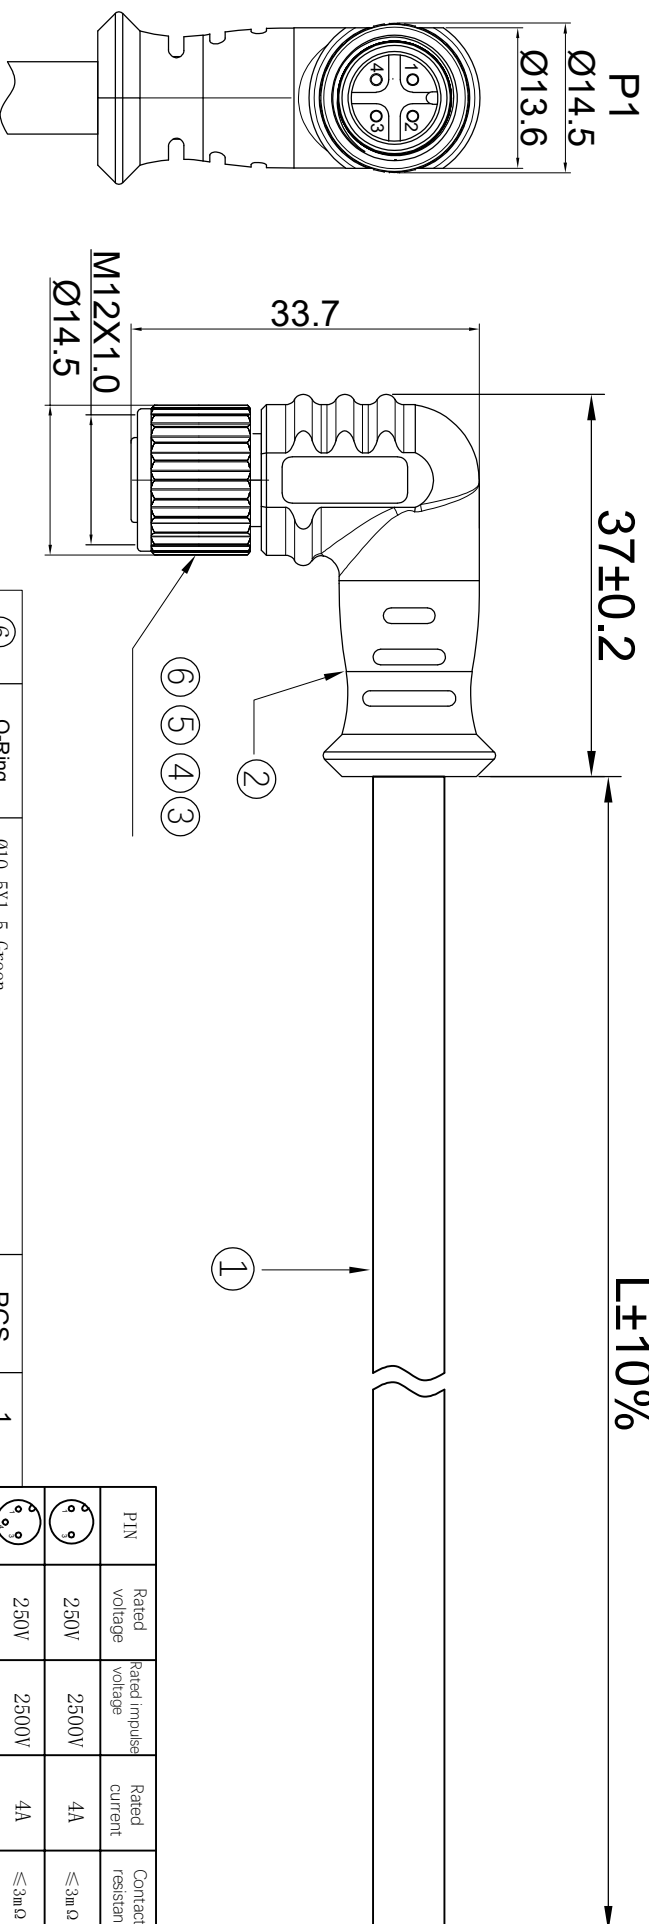

cable color

P1 color

- PIN1 — Brown
- PIN2 — White
- PIN3 — Blue
- PIN4 — Black

⑥	O-Ring	Ø10.5X1.5 Green	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
⑤	Insulator	PA66+30%GF black	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
④	Terminal	ØD:1.0 copper alloy	PCS	4		125V	1500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
③	Screwnut	M12X1.0 plastic internal thread connecting nut	PCS	1		60V	800V	2A	≤3mΩ	0.25mm ² / 24	IP67/IP68
②	Overmold	Black 45P PVC material	G	12		30V	500V	1.5A	≤3mΩ	0.14mm ² / 26	IP67/IP68
①	Cable	UL2464 4C*22AWG wire BROWN/WHITE/BLUE/BLACK JACKET:BLACK PVC L=MM	MM	L±10%		30V	500V	1.5A	≤3mΩ	0.14mm ² / 26	IP67/IP68
ITEM		NAME	SPECIFICATION	UNIF	Q'TY						
Undeclared tolerance		0.5 - 3		±0.1							
		>3 - 6		±0.1							
		>6 - 30		±0.2							
		>30-120		±0.3							
		>120-400		±0.5							
		>400-1000		±0.8							
		Design		YOYO							
		audit		ZZH							
		drawing		HSY							
		countersign		WGZ							
		amend		...							
		approve		TFY							
		MaterialPVC		pcs							
		Q'TY:		pcs							
		date:									
		Quality		percentage							
		■ Qua		□ Re							
		First sheet		OF1							
		Number:M12A4PFWT L M22AWG									
		M12-4 Pin A code Plastic Female right angle Connector									