
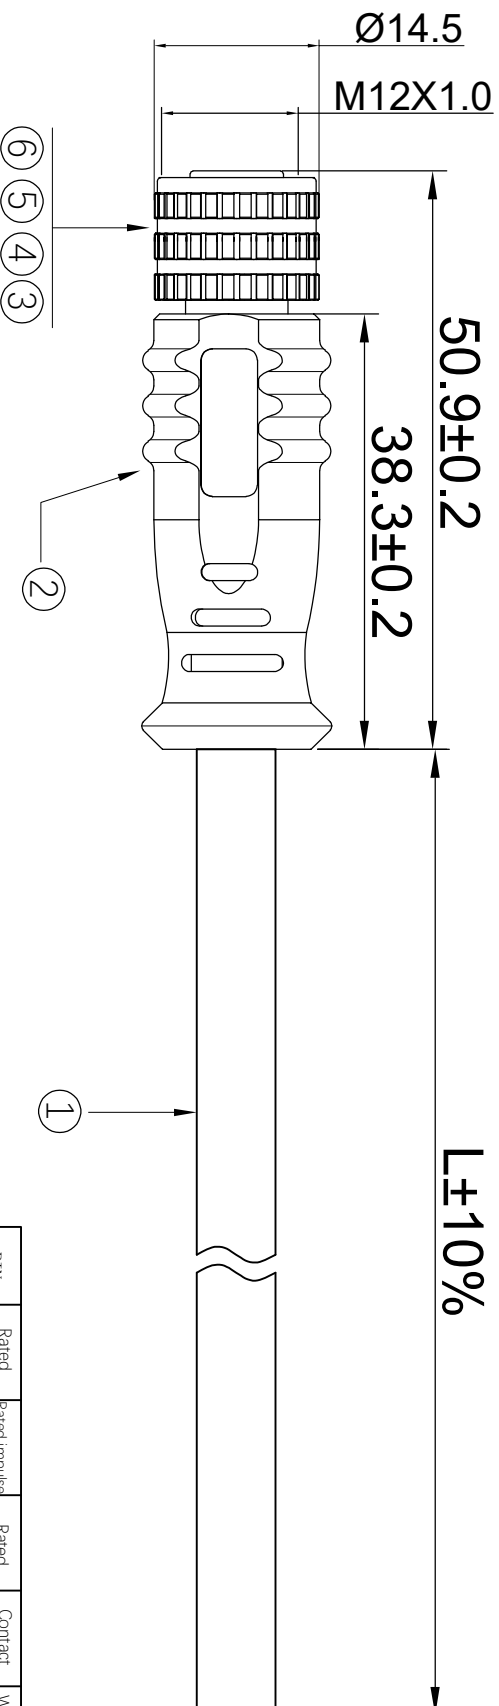


ROHS

A - coded										
B - coded										
D - coded										



cable color

- P1 color
- PIN1 — Brown
 - PIN2 — White
 - PIN3 — Blue
 - PIN4 — Black
 - Shell — Shield

ITEM	NAME	SPECIFICATION	UNIF	Q'TY	PIN	Rated voltage	Rated impulse voltage	Rated current	Contact resistance	Wire gauge (mm) / AWG	Degree of protection
⑦	Shield	Brass Nickel Plated	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
⑥	O-Ring	Ø10.5X1.5 Green	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
⑤	Insulator	PA66+30%GF black	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
④	Terminal	ØD:1.0 copper alloy	PCS	4		125V	1500V	4A	≤3mΩ	0.25mm ² / 24	IP67/IP68
③	Screwnut	M12X1.0 Female Nut Brass Nickel Plated	PCS	1		60V	800V	2A	≤3mΩ	0.25mm ² / 24	IP67/IP68
②	Overmold	Black 45P PVC material	G	12		30V	500V	1.5A	≤3mΩ	0.14mm ² / 26	IP67/IP68
①	Cable	UL2464 4C*22AWG Wire BROWN/WHITE/BLUE/BLACK JACKET:BLACK PVC L=MM	MM	L±10%		30V	500V	1.5A	≤3mΩ	0.14mm ² / 26	IP67/IP68
SPECIFICATION											
Undeclared tolerance					M12-4 Pin A code Shield Female Straight Connector						
0.5 - 3 ±0.1					MaterialPVC						
>3 - 6 ±0.1					Quality						
>6 - 30 ±0.2					number: M12A4PFZT L M22AWG-S						
>30-120 ±0.3					Quantity						
>120-400 ±0.5					<input checked="" type="checkbox"/> Qua <input type="checkbox"/> Re 1:1						
>400-1000 ±0.8					First sheet OF1						
					date:						

Design	YOYO
audit	ZZH
drawing	HSY
countersign	WGZ
amend	...
approve	TFY

Q'TY:	pcs
-------	-----