


# ROHS

A - coded								
B - coded								
D - coded								

37.01

L±10%

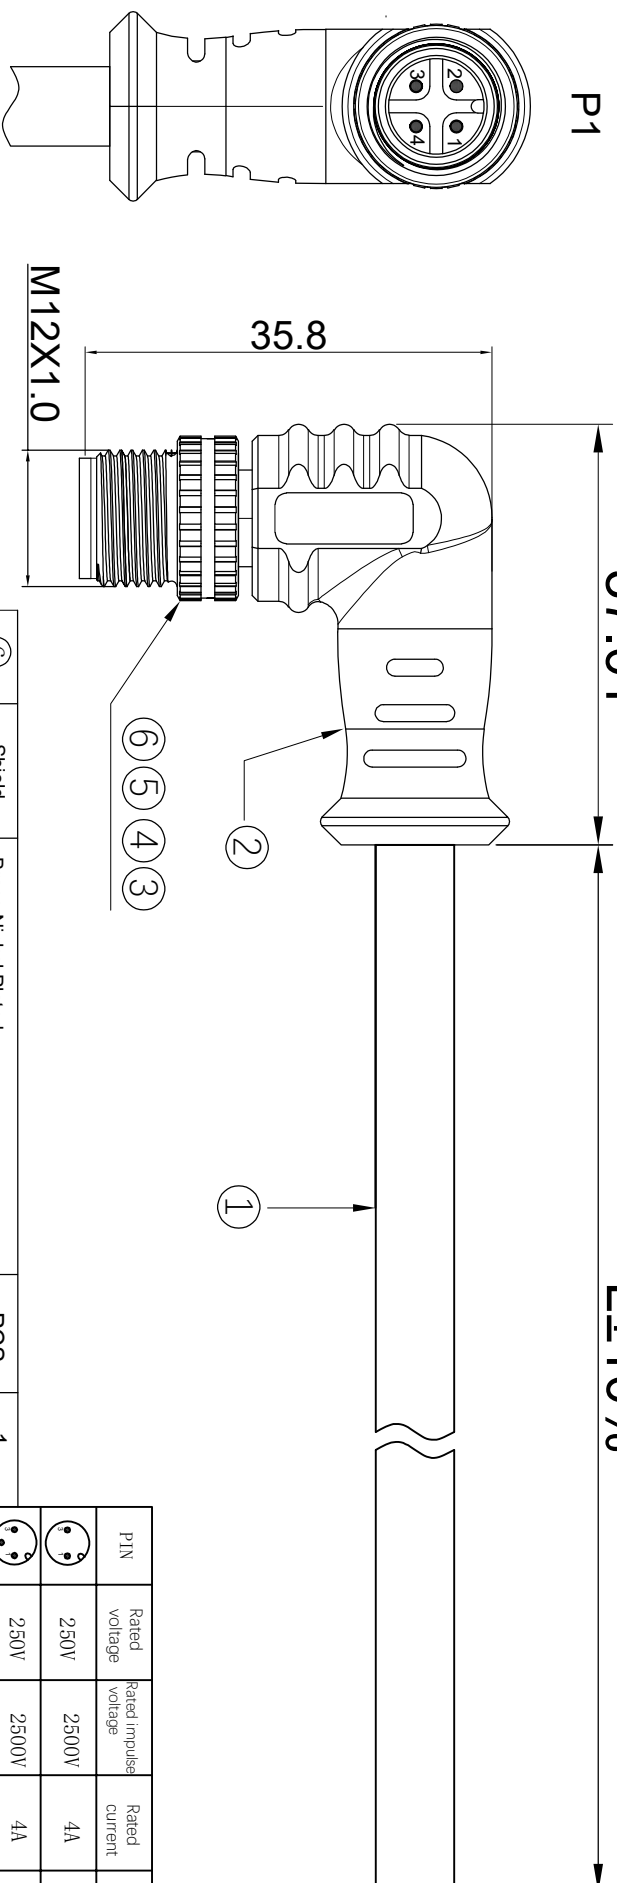

## cable color

P1 color

PIN1 — Brown

PIN2 — White

PIN3 — Blue

PIN4 — Black

Shell — Shield

⑥	Shield	Brass Nickel Plated	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm <sup>2</sup> / 24	IP67 / IP68
⑤	Insulator	PA66+30%GF black	PCS	1		250V	2500V	4A	≤3mΩ	0.25mm <sup>2</sup> / 24	IP67 / IP68
④	Terminal	OD:1.0 copper alloy	PCS	4		125V	1500V	4A	≤3mΩ	0.25mm <sup>2</sup> / 24	IP67 / IP68
③	Screwnut	M12X1.0 Male Nut Brass Nickel Plated	PCS	1		60V	800V	2A	≤3mΩ	0.25mm <sup>2</sup> / 24	IP67 / IP68
②	Overmold	Black 45P PVC material	G	12		30V	500V	1.5A	≤3mΩ	0.14mm <sup>2</sup> / 26	IP67 / IP68
①	Cable	UL2464 4C*22AWG+B+P Wire BROWN/WH/TE/BL/BLACK JACKET:BLACK PVC L= MM	MM	L±10%		30V	500V	1.5A	≤3mΩ	0.14mm <sup>2</sup> / 26	IP67 / IP68

Undeclared tolerance	±0.1	Design	YOYO	M12-4 Pin A code Shield Male right angle Connector	Number M12A4PMWT L M22AWG-S
----------------------	------	--------	------	--	-----------------------------

>3 - 6	±0.1	audit	ZZH	Material: PVC	Quality	percentage
--------	------	-------	-----	---------------	---------	------------

>6 - 30	±0.2	drawing	HSY	Q'TY: pcs	Qua	Re	1:1
---------	------	---------	-----	-----------	-----	----	-----

>30-120	±0.3	counter sign	WGZ	date:	First sheet	OF1
---------	------	--------------	-----	-------	-------------	-----

>120-400	±0.5	amend	...			
----------	------	-------	-----	--	--	--

>400-1000	±0.8	approve	TFY			
-----------	------	---------	-----	--	--	--